

Dip tank **DT**



Operating principle

The dipping tank is used for root crops such as potatoes, carrots etc., which require a controlled contact time with water (with or without additives).

The product is collected in 8 compartments within the rotating drum which can accept approx. 25 kg of product per compartment. The drum is mounted within a stainless steel water holding tank of approx. 1,400 litres. The product can be continually loaded into the machine and each compartment contra rotates submerging everything below the water surface. The discharge of the product is on the opposite side of the infeed.

Rotational dwell times are controlled with average parameters between 1-5 minutes.

The dipping tank is completely manufactured in stainless steel and equipped with a drain valve and two manhole openings for cleaning access.

Capacity

The capacity is dependent on the dwell time and is between 1,000 - 5,000 kg/h with a dwell time of 5 to 1 minute.

Options

- frequency control

Features

- suitable for floating and non-floating product
- dwell times can be simply adjusted by a speed controller
- very solid construction





Product specification

The dipping tank processes product with a maximum diameter of 200 mm.

Technical data

Type	DT-140
Voltage	230/400V, 3ph, 50Hz
Installed power	0.37 kW
Dimensions (LxWxH)	1,700 x 2,055 x 1,800 mm

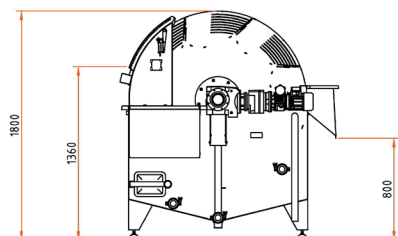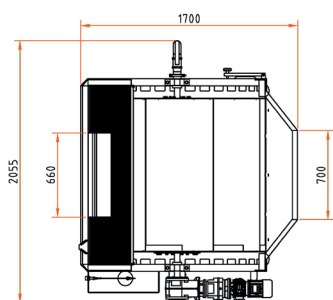

Sormac B.V.

P.O. Box 419
NL-5900 AK Venlo
Huiskensstraat 68
NL-5916 PN Venlo

T: +31 (0)77 351 84 44
F: +31 (0)77 320 48 01
info@sormac.nl
www.sormac.nl

Subject to change